
CLIPLOC Info Sheet



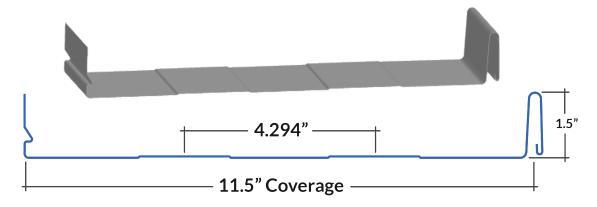

Floating Clip Panel System

The *ClipLoc* panel system provides the ease of installation, like our *Nail Strip* panel, but with the flexibilty of a concealed floating clip system. Clips allow the panels to expand and contract with the temperature changes without causing strain or tension on panels or fasteners.

ClipLoc panels are available with striations or minor ribs, which we recommend to minimize the appearance of oil-canning.

Applications: Roof & Wall

Coverages: 11.5" & 16" (custom: 7.5" to 19.5") | Depth: 1.5"

Panel Length: Up to 50' (minimum length: 36")

Available Gauge: 24

Available in 40+ Standard Colours & Specialty Finishes

Substrate: 5/8" standard plywood minimum / Purlins

Suitable for low sloped roofs down to 1.5/12 or 3/12

Note: Confirm with construction standards and underlayment manufacturing

Allows for expansion without the use of a seaming tool

Note: Extended lead times may apply for custom widths




interchangably on your exteriors.

CLIPLOC

Recommended Trims

Our trim codes will depend on your rib height/coverage of choice. Included on this sheet are the most commonly selected trims for this panel but *custom trims are available*. When selecting your trim, please ensure you indicate your gauge & colour of choice.

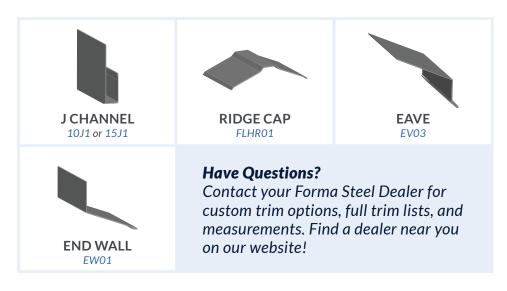





40+ Standard Colours & Specialty Finishes

To view swatches of your colour options, visit our website!





